



SL01-N230N

Slim Fingerprint Semi-outdoor Wi-Fi Door Lock



Mobile App



Fingerprint



Passcode



Card




Key



Semi-outdoor Scene



Compatible With
NGTeco Home App

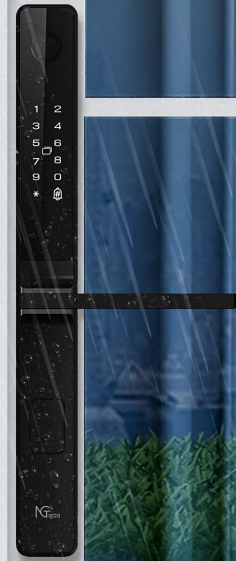

Introduction

The **SL01-N230N** is a smart lock with narrow frame design, it can be used for various types of doors, such as aluminium and wooden sliding doors and swing doors. It uses a special design and can be used in a variety of semi-outdoor scenarios. It can be managed with the **NGTeco Home** app through WiFi communication, and can remotely control and view log history, share the temporary visitor passcode, ect.

Upgrade your door security with the **SL01-N230N** Smart Lock and embrace the future of home convenience and protection.

Features



Wi-Fi Technology

Unlocks and manages the lock from anywhere, anytime



Semi-outdoor Scene

Suitable for use in semi-outdoor environments



Built-in Door Bell

Answer the unlock request from anywhere through the ZSmart APP



Unlock Records Checking

View the logs of who has opened the lock



Temporary Password Sharing

Sharing access with temporary passwords for visitors



Smart Warning

Error-Detection alert for any abnormal behavior



USB Type-C Interface

Equipped with a commonly used Type-C emergency power interface





Admin Lockout Mode

Access authority is restricted to administrators only.


Specifications

Material	Housing Material	Aluminium Alloy
	Color Options	Black
Mortise Lock	Type	2885 mortise with hook
	Backset	28 mm
	Axe Distance	85 mm
	Square Spindle	7.8 mm
	Faceplate (H×W)	22×270 mm; squared standard
Technical	Unlocking Methods	Fingerprint, Card, Passcode (6 to 10 digits), NGTeco Home APP, Mechanical Key
	Capacity	200 (Fingerprint + Passcode + Card) Mobile App Records: last 6 months
	Fingerprint Sensor	Capacitive
	Card Reader	IC Card @13.56 MHz NFC Supported
	Audio Prompt Language	English, Spanish, Portuguese, Vietnamese, Thai, Russian, Arabic, indonesian
	Wireless Communication	Wi-Fi (IEEE 802.11b/g/n) @ 2.4 GHz BLE 5.0 (only for network configuration)
	Emergency Power	USB Type-C Interface, DC 5V
	Power Supply	4× AAA Alkaline Batteries
	Battery Life	approximately 6 months <small>* Battery life is estimated based on an average of 10 accesses per day while maintaining the Wi-Fi connection</small>
	Supported App	NGTeco Home
Door Compatibility	Door Type	Swing Door, Sliding Door
	Door Thickness	30 to 60mm
	Opening Direction	All Direction
General	Product Dimensions (H×W×T)	Front: 358*143.1*66mm Back: 358*143.1*66mm
	Operating Temperature	-20°C to 55°C (-4°F to 131°F)
	Operating Humidity	20% to 90% RH (Non-condensing)
	Certifications	CE
Package Contents	Exterior Assembly, Interior Assembly, Mortise Kit, Mechanical Key * 2, Studs & Screws Kit, IC Card * 2, Installation Template, Installation Guide & User Manual	

Mobile Application

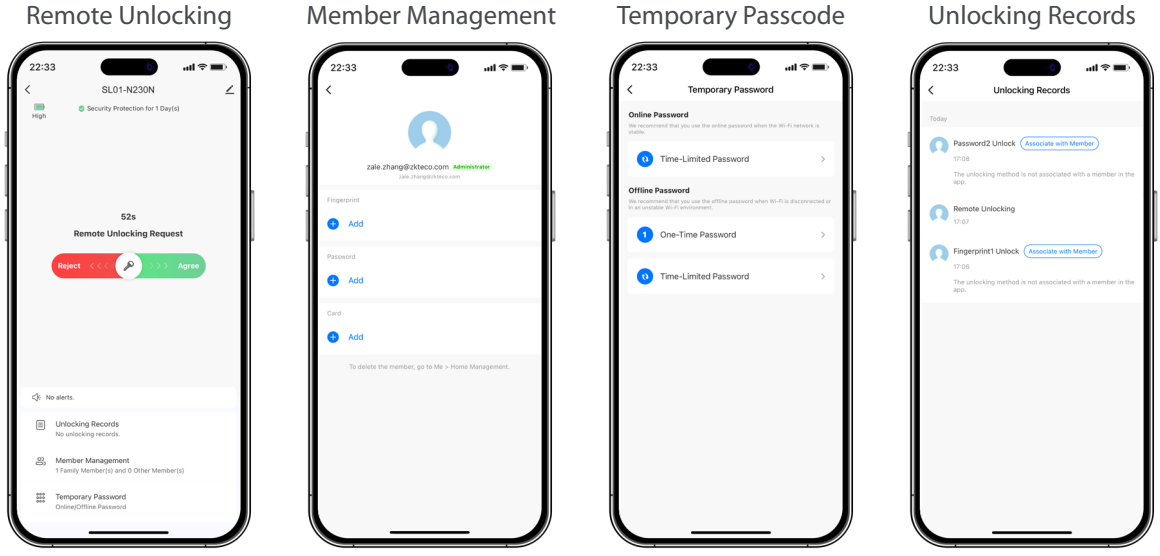

Dimensions(mm)

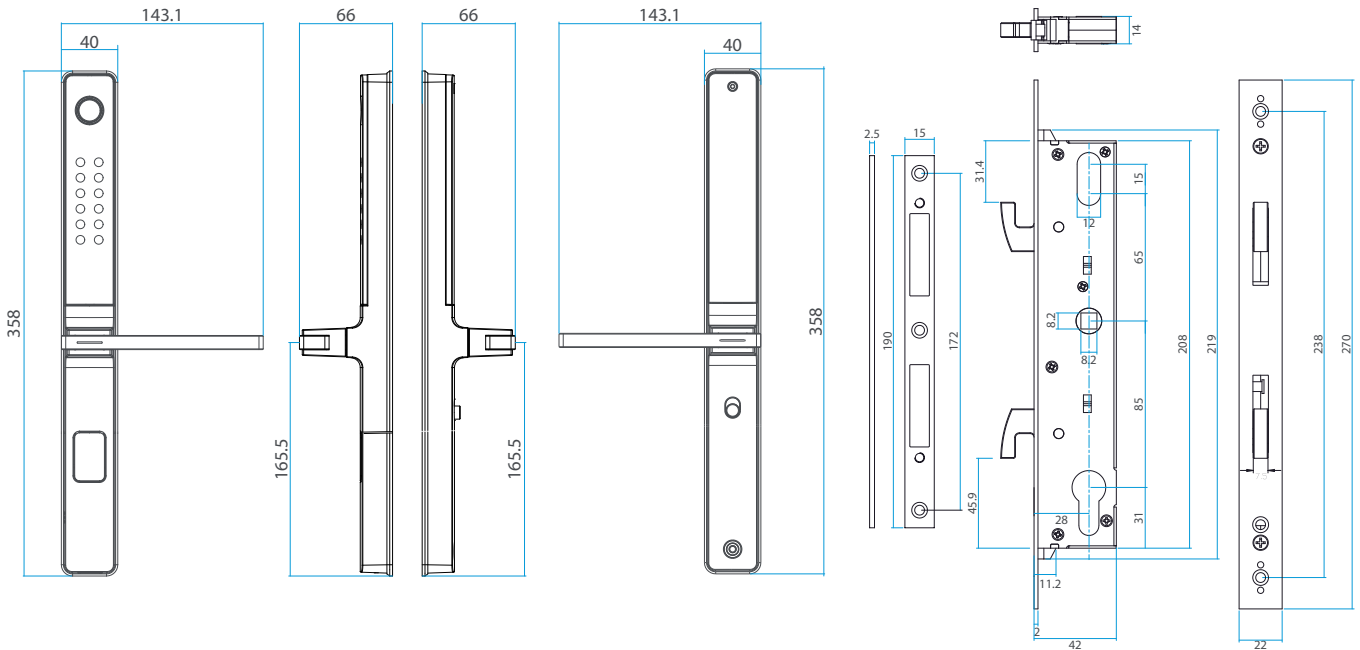

NGTECO CO., LIMITED

www.ngteco.com

service.ng@ngteco.com



Copyright © 2024 NGTECO CO., LOIMITED. All rights reserved.

V1.0 12/12/2024