



SL01-T330N

Wi-Fi-Enabled Fingerprint Smart Lock
With European Standard 5050 Mortise

- No Wiring or Drilling Required
- Easy to Install and Retrofit
- Emergency Charging Port
- Random Passcode
- IC Card / NFC
- Low Battery Alarm

Compatible With
NGTECO Home App



Introduction

The SL01-T330N is a smart lock with a European Standard 5050 mortise, which can connect to Wi-Fi for remote unlocking, password sharing, record tracking, and managing lock users and visitors through a smartphone. In addition, this smart lock offers multiple ways of unlocking including fingerprint, IC card, NFC and pass code.

As a result, SL01-T330N is an ideal door lock management solution for apartments and private houses.

Features



Remote Unlocking With Mobile App

Unlock and manage the lock from anywhere




Wi-Fi Communication

Ensure a fast and stable by Wi-Fi IEEE 802.11b/g/n (2.4GHz Wi-Fi)



Audio Instructions

User-friendly audio prompts, support English and Chinese



Random Passcode

Add random digits to protect your passcode from prying eyes



Capacitive Fingerprint Sensor

Fast verification for dry and rough fingers



Emergency Charging Port

Charging via the micro-USB port



Temporary Access

Share digital keys valid for specific time to friends or guests



Smart Alerts

Receive real-time notifications of low battery, hijack and offline



NFC

Bind the IC card to your mobile wallet, and unlock your door with your smartphone or your IC card. No worries about misplacing your IC card



Lock Out Mode

All normal users (other than admin) will be locked out

Specifications

Housing Material	Aluminum Alloy
Mortise	European Standard 5050 mortise
Unlocking Methods	Smartphone, Fingerprint, Passcode, IC Card, NFC
Wireless Communication	Wi-Fi (IEEE 802.11b/g/n) @ 2.4 GHz BLE 5.0 (only for network configuration)
User Capacity	300
Fingerprint Capacity	100 (administrator: 10, normal user: 90)
Passcode Capacity	100 (administrator: 10, normal user: 90)
IC Card	100 (only normal user: 100)
Fingerprint Sensor	Capacitive
Power Supply	4 × AA Alkaline Batteries (not included)
Battery Life	approximately 10 months * Battery life is estimated based on an average of 10 accesses per day while maintaining the Wi-Fi connection
Emergency Power	Micro-USB
Door Thickness	35 to 60 mm (standard)
Product Dimensions (HxWxT)	265x60x22 mm
Operating Temperature	-25°C to 55°C (-4°F to 131°F)
Operating Humidity	10% to 90% RH (Non-Condensing)
Certification(s)	CE
Color Option(s)	Black
Supported App	NGTeco Home App

Applicable Scenarios



Private Houses





Apartments




Short-term Rental

Mobile Application

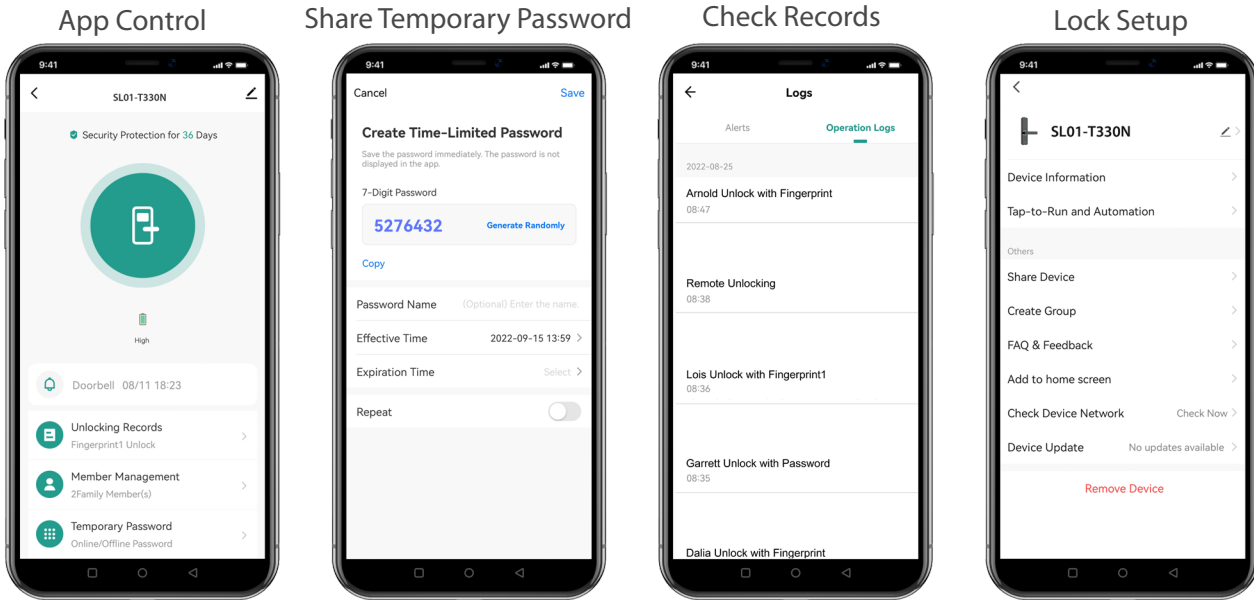

Dimensions(mm)

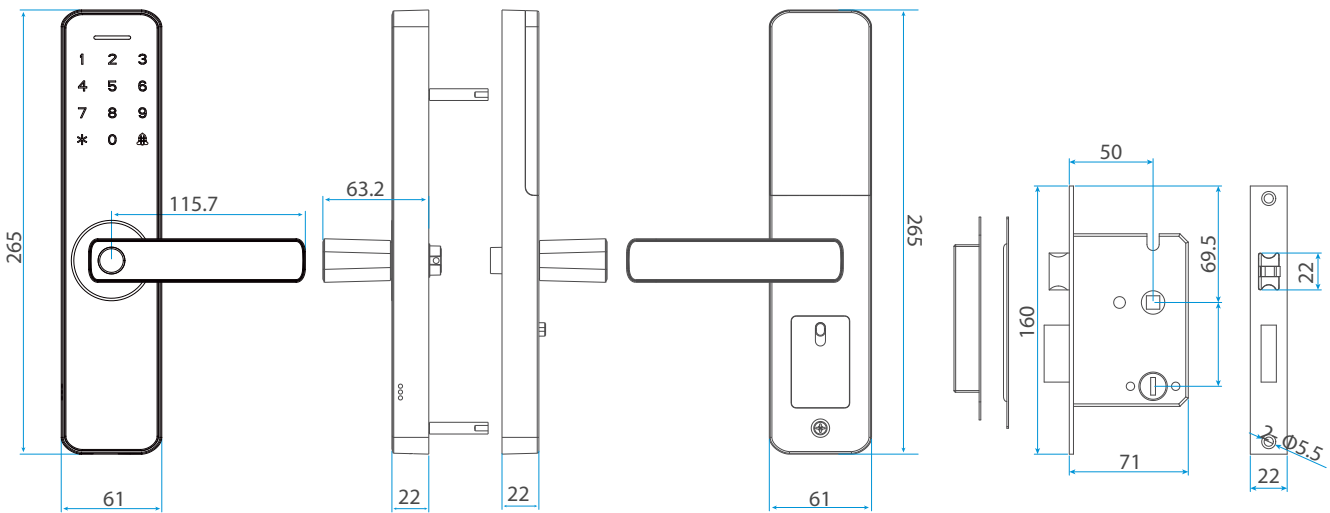

NGTECO CO., LIMITED

www.ngteco.com

service.ng@ngteco.com



Copyright © 2024 NGTECO CO., LOIMITED. All rights reserved.

V1.0 12/30/2024